

# CEDARWAY®

## BUILDER CLASSIC

The handcrafted allure of real split cedar is lovingly captured and enhanced by Cedarway, the industry's finest cedar shake replica that brings interest, value and prestige to homes of every size and style.

### FINALLY, A SHAKE PANEL DONE THE CEDARWAY!

- Polypropylene injection molded color through panel
- Double course 4" construction, .090 thick with positive locking tabs, seamless installation
- Won't warp, rot, split, cut or twist
- Requires little maintenance



Cedarway's long-standing reputation for quality craftsmanship and unmatched authenticity has made it one of today's most sought after cedar shake alternatives. Now we are proud to introduce a new addition to the family.

Finally, homeowners can enjoy the natural elegance of our traditional panel. Plus, it comes with a full line of matching accessories to give you the freedom of unlimited design options.

### AUTHENTIC DEPTH OF GRAIN

Patterned directly from real split cedar, these high-performance panels impart a natural handcrafted appearance, with an authentic looking deep grain that shows on the edges.



### POPULAR EXTERIOR ACCENTS

No matter the architectural style of your home, Cedarway has the color solution that's right for you in both traditional and hand split profiles.

### MAINTENANCE-FREE

Real split cedar is adversely affected by the weather, and requires constant and costly upkeep. Although it looks virtually identical to real split cedar, Cedarway is designed to withstand the elements. It won't crack, warp, rot, split, cut or twist, providing years of beauty and performance with little or no maintenance.



[www.cedarwaysiding.net](http://www.cedarwaysiding.net)

### HAND SPLIT SHAKE


- 18" panel (double course) with 37" exposure
- 22 panels per 100 sq. ft. of coverage
- Material thickness .10 inch
- Panel weight 3.8 pounds
- Color is controlled spectrophotometrically

### TRADITIONAL SHAKE

- 14" panel (double course) with 48" exposure
- 22 panels per 100 sq. ft. of coverage
- Material thickness .090 inch
- Panel weight 3.5 pounds
- Color is controlled spectrophotometrically

### TRADITIONAL HALF ROUND

- 15 1/2" panel (double course) with 35" exposure
- 33 panels per 100 sq. ft. of coverage
- Material thickness .090 inch
- Panel weight 2.2 pounds
- Color is controlled spectrophotometrically

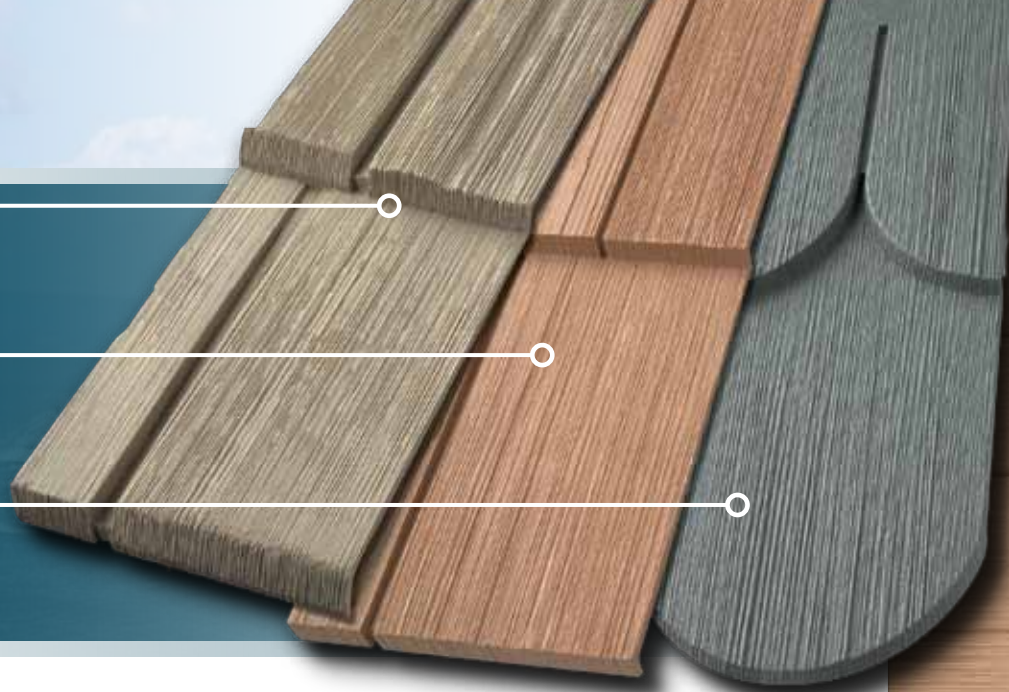

## ENHANCED PERFORMANCE FEATURES

Each panel is molded with **Secure Lock** reinforced nail slots for optimum holding power in the face of gale force winds.

Special **Accurate Mark temperature lines** molded into the backs of panels help to ensure proper placement in cold weather. This makes installation faster as well as more accurate and precise.



For added stability and extra protection against warping and distortion, **special structural ribs** have been molded into the back of each panel.

A perimeter lock, part of our **True Hold** installation system, creates a seamless look and holds the panels securely together.

The **Easy Lock** system enables panels to be installed under a window or at the end of a wall without tilting.

**Weep slots** along the bottom edge of the panel help relieve any humidity build-up between the cladding and the wall.



*Traditional shake shown above.*

### GREEN ATTRIBUTES:

- No VOC's (Volatile Organic Compounds) produced during production, keeping the atmosphere clean.
- Color through design, no painted surfaces further protecting the environment and increasing Cedarway durability.
- Polypropylene is not a food source for mold or insects and provides a thick barrier to protect the structure.

## BUILDER CLASSIC SPECIFICATIONS

- 4' Double 7"
- 4' Double 9" HS
- 4' Double Half Round

Builder Classic Series available in Classic colors only. Wide variety of colors available.

**ALSO AVAILABLE: long length Premium Series**



1.888.501.9879  
www.cedarwaysiding.net

